





**Front View**

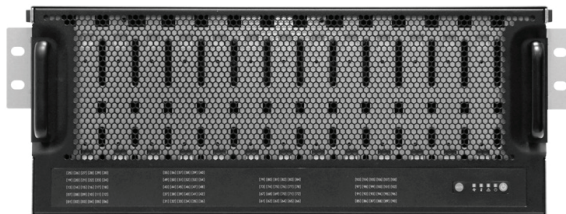

### Features

- Intelligent Enclosure Management
- Individual drive power management
- Hot swap design for easy maintenance and management
- Enclosure Cable Management Kit
- Tool-less drive trays

**Rear View**

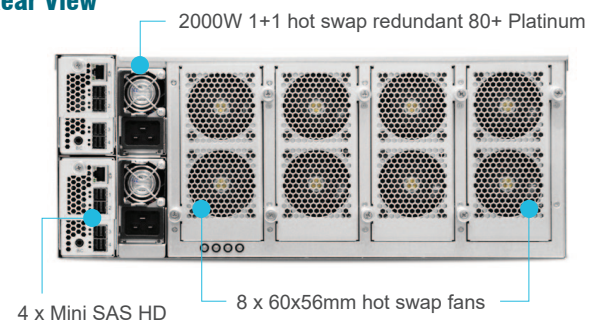

### Specifications

<b>General</b>	Number of Expander	Single/Dual
	Expander Chip	Broadcom SAS35X48
	Host/Expansion Interface	4 x Mini SAS HD (SFF-8644) per expander module
<b>Drives Supported</b>	Drive Interface	12Gb & 6Gb SAS if using dual expanders 12Gb & 6Gb SAS/SATA if using single expander
	Form Factor	3.5"
<b>Administration / Management</b>	Admin/Firmware Upgrade	In-band & IEM port
	LED Indicators, Audible Alarm	Yes
<b>Hot swap and Redundancy</b>	Drive Bays	108
	Cooling	• 8 x 60x56mm hot swap fans • 1 x 40x56mm fan per expander module
	Power Supply	2000W 1+1 hot swap redundant 80+ Platinum • Socket type: C20 (Power code type: C19)
	Power Entry	Dual AC Inlet
	Expander Modules	Dual SAS topology (Optional)

<b>Electrical and Environmental</b>	AC Input	200~240V,50/60Hz,15A
	Operating Environment	Temperature : 0°C to 35°C Relative humidity : 20% to 80%
	Non-operating Environment	Temperature : -20°C to 60°C Relative humidity : 10% to 90%
<b>Physical Specification</b>	Dimensions (W x D x H)	mm : 434 x 1050 x 176 434 x 1273 x 176 (with CMA) inches : 17 x 41 x 7 17 x 50 x 7 (with CMA)
	Gross Weight (w/ PSU, Rail and Pallet; w/o Disks)	kgs : 66.97 lbs : 147.6
	Packaging Dimensions (W x D x H)	mm : 640 x 1380 x 526 inches : 25.2 x 54.3 x 20.7
<b>Mounting</b>	Standard	41" fixed rail
	Option	Cable Management Kit

### Ordering Information

SKU Number	Description
XJ1-41081-01	4U 108x 3.5" hot-swap bays, hot-swap JBOD with single SAS 12G expander controller, single BMC, tool-less HDD tray, 2000W 1+1 hot-swap redundant 80+ platinum, tool-less rail kit
XJ1-41081-02	4U 108x 3.5" hot-swap bays, hot-swap JBOD with dual SAS 12G expander controller, dual BMC, tool-less HDD tray, 2000W 1+1 hot-swap redundant 80+ platinum, tool-less rail kit