

1. Package Contents

Thank you for purchasing PLANET IGS-824UPT Industrial 8-Port Gigabit Ethernet Switch with 4-Port PoE++. The interfaces of this model are shown below:

Model Name	10/100/1000T RJ45 Port	100/1000X SFP Slot	PoE Port
IGS-824UPT	6	2	4

Open the box of the Industrial PoE++ Switch and carefully unpack it. The box should contain the following items:

Industrial PoE++ Switch x 1	User's Manual x 1	Wall-mount Kit x 1
		
DIN-rail Kit x 1	RJ45 Dust Cap x 6	SFP Dust Cap x 2
		

If any of these are missing or damaged, please contact your dealer immediately.

- 1 -

Installation	DIN-rail kit and wall-mount kit
ESD Protection	6KV
Switch Specifications	
Switch Architecture	Store-and-Forward
Switch Fabric	16Gbps
Throughput (packet per second)	11.9Mpps@64bytes
Address Table	4K entries
Buffer Memory	1M bits on-chip buffer memory
Jumbo Frame	9Kbytes
Flow Control	Back pressure for half duplex IEEE 802.3x pause frame for full duplex
Power over Ethernet	
PoE Standard	IEEE 802.3bt PoE++ type 4 PSE Backward compatible with IEEE 802.3at PoE+ PSE
PoE Power Supply Type	802.3bt/PoH End-span/Mid-span
PoE Power Output	Max. 90 watts to 802.3bt PoE++ PD Max. 95 watts to PoH PD Max. 36 watts to 802.3at PoE+ PD
Power Pin Assignment	End-span: 1/2(-), 3/6(+) Mid-span: 4/5(+), 7/8(-) 802.3bt/PoH: 1/2(-), 3/6(+), 4/5(+), 7/8(-)
PoE Power Budget	240 watts maximum@52-54V DC input 160 watts maximum@48-51V DC input

- 3 -

3. Hardware Introduction

3.1 Switch Front Panel

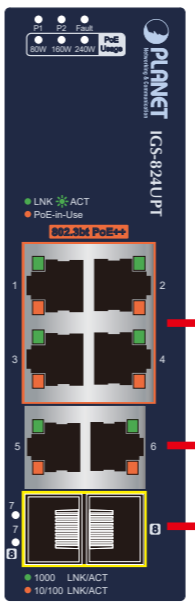


Figure 1: IGS-824UPT Front View

- Gigabit Ethernet PoE++ Interfaces**
802.3bt PoE++
10/100/1000BASE-T copper, RJ45 twisted-pair: Up to 100 meters.
- Gigabit Ethernet TP Interfaces**
10/100/1000BASE-T copper, RJ45 twisted-pair: Up to 100 meters.
- 100/1000BASE-X SFP Slot**
The SFP slots built in the IGS-824UPT supports **SFP auto-detection** and dual speed as it features **1000BASE-SX/LX/BX** and **100BASE-FX** SFP (small form-factor pluggable) fiber-optic modules. The distance can be extended from 550 meters to 2 kilometers (multi-mode fiber) and 10/20/40/60/80/120 kilometers (single-mode fiber or WDM fiber).

- 5 -

➤ Per 802.3bt PoE++ 10/100/1000BASE-T Interface (Port 1 to Port 4)

LED	Color	Function
LNK/ACT	Green	Lights to indicate the link through that port is successfully established at 10Mbps or 100Mbps or 1000Mbps. Blinks to indicate that the Switch is actively sending or receiving data over that port.
PoE-in-Use	Amber	Lights to indicate the port is providing DC in-line power. Off to indicate the connected device is not a PoE powered device (PD).

➤ Per 10/100/1000BASE-T Interface (Port 5 and Port 6)

LED	Color	Function
1000 LNK/ACT	Green	Lights to indicate the port is successfully established at 1000Mbps. Blinks to indicate that the Switch is actively sending or receiving data over that port.
10/100 LNK/ACT	Amber	Lights to indicate the port is successfully established at 100Mbps or 10Mbps. Blinks to indicate that the Switch is actively sending or receiving data over that port.

- 7 -

2. Product Features

Model	IGS-824UPT
Hardware Specifications	
Copper Ports	6 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
SFP Slots	2 1000BASE-SX/LX/BX SFP interfaces Compatible with 100BASE-FX SFP
Connector	Removable 6-pin terminal block Pin 1/2 for Power 1 Pin 3/4 for fault alarm Pin 5/6 for Power 2
Alarm	One relay output for power failure. Alarm relay current carry ability: 1A@ DC 24V
Power Requirements	48~54V DC, 5A (max.) Redundant power with reverse polarity protection function
Power Consumption	Max. 2.24 watts/7.64BTU (System on) Max. 5.2 watts/17.74BTU (Ethernet Full Loading) Max. 252 watts/860BTU (Ethernet + PoE Full Loading)
Dimensions (W x D x H)	55 x 85 x 135 mm
Weight	777g
Enclosure	IP30 aluminum case

- 2 -

Standard Conformance	
Regulatory Compliance	FCC Part 15 Class A, CE
Stability Testing	IEC 60068-2-32 (free fall) IEC 60068-2-27 (shock) IEC 60068-2-6 (vibration)
Standards Compliance	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3az Gigabit SX/LX IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3bt Power over Ethernet Plus Plus IEEE 802.3at Power over Ethernet Plus PSE IEEE 802.1p Class of Service
Environment	
Temperature	Operating: -40~75 degrees C Storage: -40~75 degrees C
Humidity	Operating: 5~90% (non-condensing) Storage: 5~90% (non-condensing)

- 4 -

3.2 LED Indicators

➤ System

LED	Color	Function
P1	Green	Lights to indicate power 1 has power.
P2	Green	Lights to indicate power 2 has power.
FAULT	Red	Lights to indicate either power 1 or power 2 has no power.

➤ PoE Power Usage (Unit: Watt)

LED	Color	Function
80W	Amber	Blinks to indicate that the PoE usage is around 40W to 79W. Lights to indicate the PoE usage is around/over 80W.
160W	Amber	Blinks to indicate that the PoE usage is around 120W to 159W. Lights to indicate the PoE usage is around/over 160W.
240W	Amber	Blinks to indicate that the PoE usage is around 200W to 239W. Lights to indicate the PoE usage is at the maximum.

- 6 -

➤ Per 1000BASE-X SFP Slot (Port 7 and Port 8)

LED	Color	Function
1000 LNK/ACT	Green	Lights to indicate the port is successfully established at 1000Mbps. Blinks to indicate that the Switch is actively sending or receiving data over that port.
100 LNK/ACT	Amber	Lights to indicate the port is successfully established at 100Mbps Blinks to indicate that the Switch is actively sending or receiving data over that port.

3.3 Switch Upper Panel

The upper panel of the Industrial PoE++ Switch consists of one terminal block connector within two DC power inputs.

Figure 3-2 shows the upper panel of the Industrial PoE++ Switch.

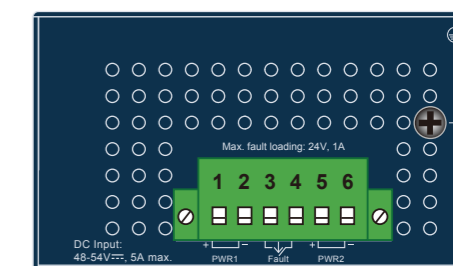


Figure 3-2: Industrial PoE++ Switch Upper Panel

- 8 -

3.4 Wiring the Power Inputs

The 6-contact terminal block connector on the top panel of Industrial PoE++ Switch is used for two DC redundant power inputs. Please follow the steps below to insert the power wire.



When performing any of the procedures like inserting the wires or tightening the wire-clamp screws, make sure the power is OFF to prevent from getting an electric shock.

1. The DC power input range is **48V ~ 54V DC**. Please insert positive and negative DC power wires into contacts 1 and 2 for POWER 1, or 5 and 6 for POWER 2.


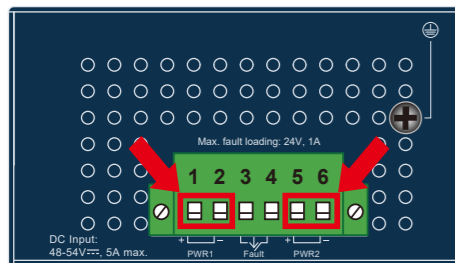


Figure 3-3: Industrial PoE++ Switch DC Input

DC Input	Max. PoE Budget
48~51V	160W
52V~54V	240W

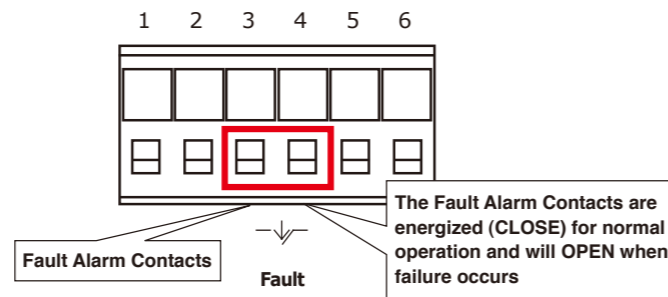


- Note**
1. The wire gauge for the terminal block should be in the range between 12 and 24 AWG.
 2. Alarm relay circuit accepts up to 24V, max. 1A currents.

3.6 Grounding the Device



Uses **MUST** complete grounding wired with the device; otherwise, a sudden lightning could cause fatal damage to the device.

- Note**
- EMD (Lightning) DAMAGE IS NOT COVERED UNDER WARRANTY.



1. To avoid damage, please use the Industrial PoE++ Switch according to its specifications.
2. Please follow the table above for DC input in relation with maximum PoE budget.

2. Tighten the wire-clamp screws for preventing the wires from loosening.

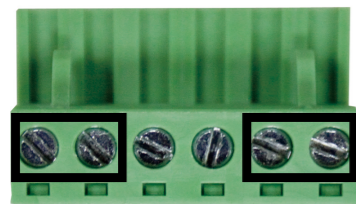

The wire gauge for the terminal block should be in the range between 12 and 24 AWG.

3.5 Wiring the Fault Alarm Contact

The fault alarm contacts are in the middle of the terminal block connector as the picture shows below. Inserting the wires, the Industrial PoE++ Switch will detect the fault status of the power failure and then forms an open circuit. The following illustration shows an application example for wiring the fault alarm contacts.

4. Installation

This section describes the functionalities of the Industrial PoE++ Switch's components and guides you to installing it on the DIN-rail and wall. Basic knowledge of networking is assumed. Please read this chapter completely before continuing.

- Note**
- This following pictures show how to install the device. However, the device in the picture is not IGS-824UPT.

4.1 DIN-rail Mounting Installation



4.2 Wall-mount Plate Mounting



www.PLANET.com.tw

Industrial 8-Port 10/100/1000T 802.3bt PoE + 2-Port 10/100/1000T + 2-Port 100/1000X SFP Ethernet Switch

IGS-824UPT

PLANET Technology Corp.
10F., No. 96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan

Warning:
This device is compliant with Class A of CISPR 32. In a residential environment this device may cause radio interference.
2350-AH5050-000



You must use the screws supplied with the wall-mounting brackets. Damage caused to the parts by using incorrect screws would invalidate your warranty.

Customer Support

Thank you for purchasing PLANET products. You can browse our online FAQ resource at the PLANET Web site first to check if it could solve your issue. If you need more support information, please contact PLANET support team.

PLANET online FAQs:
<https://www.planet.com.tw/en/support/faq>

Support team mail address:
support@planet.com.tw

FCC Warning

This device has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the Instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense

WEEE Warning

To avoid the potential effects on the environment and human health as a result of the presence of hazardous substances in electrical and electronic equipment, end users of electrical and electronic equipment should understand the meaning of the crossed-out wheeled bin symbol. Do not dispose of WEEE as unsorted municipal waste and have to collect such WEEE separately.